

ARIES

CARBON & SCALE PREVENTION

INLINE SERIES, LAYERED BED CARTRIDGE

TASTE & ODOR CORRECTION

ORGANICS REDUCTION

CHLORINE REDUCTION

SCALE & CORROSION INHIBITOR

IRON, MANGANESE, & CALCIUM SEQUESTRATION

Aries Carbon/Phosphate combination cartridges use carbon to effectively improve taste and odor by removing chlorine and phosphate to reduce scale buildup. This combination of Premium GAC carbon and phosphate dramatically improves the quality of drinking water, as well as its ability to protect metal parts from corrosion when used in certain industries. Aries Inline filters cartridges are designed for low-flow, point-of-use filtration. Available with Quick Connect connectors in 6" and 12" lengths.



HIGHLIGHTS

- Taste, Odor & Chlorine Removal
- Scale & Corrosion Inhibitor
- GAC & Phosphate Cartridge containing ResinTech® GAC
- Quality Produced & Made in the USA
- Lot Control Traceability
- WQA GOLD Seal certified Slow Melt NSF certified Polyphosphate crystals.

APPLICATIONS

- Drinking Water
- Food And Bev
- Water and Ice

CERTIFICATIONS

- WQA Gold Seal
- Media NSF/ANSI Standard 61
- California Prop. 65 Compliant

SPECIFICATIONS

- Nominal Rating of 25µ
- Max Pressure of 125 psi (850 kPa)
- Max Temperature 100°F (38 °C)

Revision 1.0

© 2020 ResinTech, Inc.




RESINTECH INC.

INNOVATIONS IN ION EXCHANGE

DIMENSIONS	SERVICE FLOW		CAPACITY*	Volume @ 2 PPM PO ₄		PART NUMBER
	gpm	lpm		gal	L	
6 x 2 in. (Quick Connect)	0.3	1.1	14000	7000	26500	IFB-06-3390-QC
12 x 2 in. (Quick Connect)	0.6	2.3	28000	14000	53000	IFB-12-3390-QC

*Throughput is dependent upon water chemistry. Results may vary.

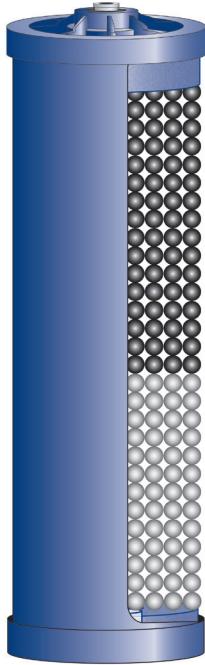

COMPONENTS

- End Caps - ABS
- Pads - PET
- Body - ABS
- Media - ResinTech® AGC-40-CA
- Slow Melt Phosphate Crystals



**WE ARE PROUD TO BE
ISO 9001 : 2015 CERTIFIED**



COMPONENT

Filter cartridge Certified to NSF/ANSI Standard 42 and NSF/ANSI Standard 61 for material requirement(s) only. Filter cartridge Certified to NSF/ANSI Standard 372 for low lead compliance.

IMPORTANT NOTICE TO USER: The following is made in lieu of all other warranties expressed or implied. Manufacturer's and Seller's only obligation shall be to issue credit against the purchase or replacement of the equipment proved to be defective in material or workmanship. Neither Manufacturer nor Seller shall be liable for any injury, loss or damage, direct or indirect, special or consequential, arising out of the use of, misuse, or the inability to use such product. The information contained herein is based on technical data and tests which we believe to be reliable and is intended for use by persons having technical skill at their discretion and risk. Since conditions of use are outside ResinTech's control, we can assume no liability whatsoever for results obtained or damages incurred through the application of the data presented. This information is not intended as a license to operate under, or a recommendation to infringe upon, any patent of ResinTech's or others covering any material or use. The foregoing may not be altered except by written agreement signed by officers of the manufacturer.